

# Polar<sup>®</sup>

## Street FX

## OUTDOOR ALUMINIUM FLOOR MATERIAL

Polar<sup>®</sup> Street FX is a PVC-free, aluminium print media for outdoor floor graphics without the need for lamination. It boasts an R12 slip-rating allowing for slip-resistant floor graphics that can be applied with confidence. Polar<sup>®</sup> Street FX has been specifically developed for rough ground surfaces such as brick, concrete, asphalt or any other low energy surfaces. Thanks to its uniquely developed adhesive, Polar<sup>®</sup> Street FX is easy to apply, dimensionally stable and can be applied without heat.

- R12 SLIP RATED ACCORDING TO DIN 51130
- PVC-FREE; 100% RECYCLABLE ALUMINIUM
- STABLE, DOES NOT SHRINK



**Drytac**  
Easy Green  
Solution

**Product Code: ALU**

**10**  
mil

Textured  
White  
Aluminium



Matte



(Eco) Solvent\*\*  
Latex  
UV




High Tack  
Clear Permanent  
Adhesive



Widths up to 48in



**EXTERIOR\***

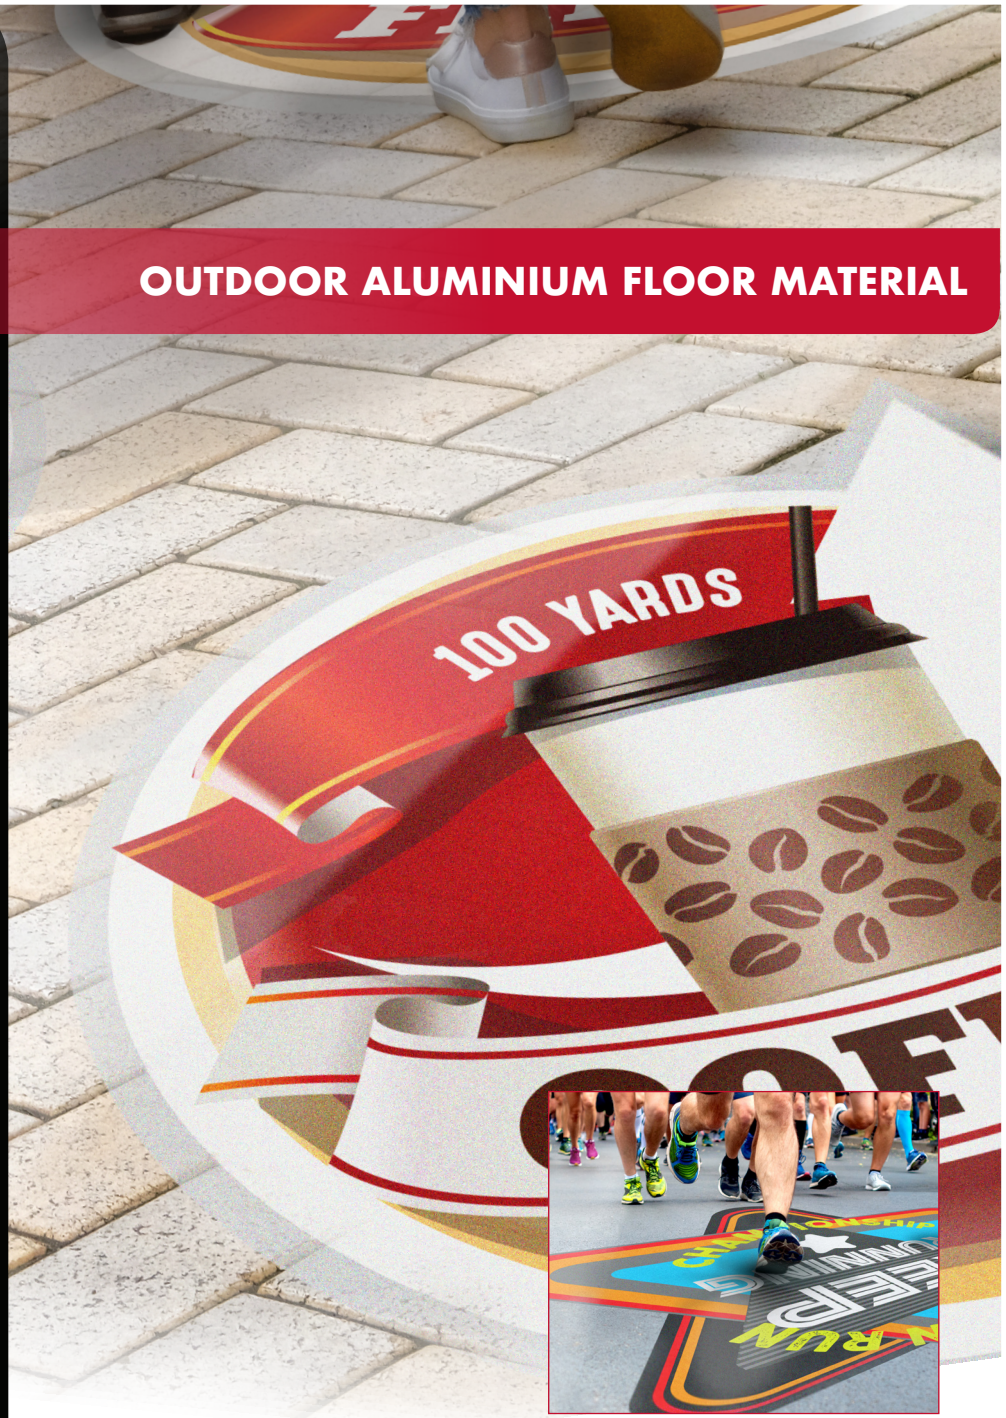

### APPLICATIONS

- BRICK
- CONCRETE
- ASPHALT
- LOW ENERGY FLOORS



**DRYTAC<sup>®</sup>**  
ADHESIVE SCIENCE

[www.drytac.com](http://www.drytac.com)

Polar® Street FX is a 250µ (10 mil) textured printable white matte aluminium film, coated on one side with a clear, high tack adhesive. The textured ink receptive film will produce high quality graphics resistant to scuffing and high traffic. Polar® Street FX has achieved several slip ratings and certifications, making it ideal for public environments.

- IDEAL FOR OUTDOOR FLOOR GRAPHIC PROMOTIONS
- PVC-FREE; 100% RECYCLABLE ALUMINIUM
- NO NEED FOR OVERLAMINATE

\* Up to 12 months durability dependent upon floor-traffic and correct installation.

\*\*\*If installed to carpet, the carpet installation surface must be short pile or tightly woven, minimal texture with a limited cushion. The carpet should be clean and dry prior to application. Due to the huge variance of carpet surfaces, materials and types along with pre and post chemical treatments, a test sample is mandatory prior to production and installation. It is important that all printer and ink manufacturer guidelines are followed. The Drytac limited warranty only covers for material defect, no returns or consequential losses will be accepted.

**For more information, performance and warranty guidelines please contact your local Drytac office.**

© 2020 Drytac Corporation. E&OE.  
All other trademarks are the property of their respective owners.

### PRODUCT STRUCTURE

<b>Film</b>	Textured White Matte Aluminium
<b>Adhesive</b>	Clear High Tack Permanent
<b>Release Liner</b>	100gsm 2 Side PE Coated Liner

### PRODUCT CHARACTERISTICS

<b>Film Thickness</b>	10 mil (250µ)   12 mil
<b>Adhesive Layer</b>	2.0 mil (50µ)   (300µ)
<b>Outdoor Durability</b>	Up to 12 months*
<b>Slip Ratings</b>	R12 (DIN 51130:2010) PASS (ANSI A137.1/A326.3)
<b>Application Temperature</b>	>-4°F (-20°C)
<b>Service Temperature Range</b>	-40°F to 356°F (-40°C to 180°C)
<b>Shelf Life</b>	2 years
<b>Storage Conditions</b>	64°F to 77°F (18°C to 25°C); 40 - 65% Relative Humidity

### \*\*PRINTING RECOMMENDATIONS

UV and Latex inks offer the greatest durability for floor applications. Due to the variance of solvent inks it is recommended scuff resistance is tested prior to installation.



www.digitalcolorink.com  
877-616-8600  
Baltimore, MD | Charlotte, NC

**DRYTAC®**  
**ADHESIVE SCIENCE**

#### Europe

Filwood Road,  
Fishponds,  
Bristol, BS16 3RY,  
United Kingdom  
bristol@drytac.com  
Tel: +44 (0) 117 958 6500

#### Canada

30 Driver Road,  
Brampton,  
Ontario, L6T 5V2,  
Canada  
toronto@drytac.com  
Tel: +1 800.353.2883

#### USA

5401-B Eubank Road,  
Sandston,  
Virginia, 23150,  
USA  
customerservice@drytac.com  
Tel: +1 800.280.6013