

ReTac®

Textures **LINEN**

ReTac® Textures Linen can add depth and visual appeal to static, flat images with its embossed Linen finish. With ReTac® on the back, eye-catching graphics printed on ReTac® Textures Linen can easily be removed and repositioned multiple times without the worry of adhesive residue being left behind. This phthalate-free film is flame resistant and can be easily applied, re-positioned and removed without surface damage or loss of adhesion.

- IDEAL FOR INTERIOR PROMOTIONS
- PERFECT FOR APPLICATION IN PUBLIC AREAS THAT REQUIRE COMPLIANCE WITH STRICT FIRE REGULATIONS
- CAN BE REMOVED WITHOUT LEAVING ADHESIVE RESIDUE

6 mil White
Phthalate-Free
Polymeric
PVC



Matte



(Eco) Solvent
Latex
UV



ReTac® ultra removable
and re-positionable
adhesive



Widths up to 54 in




INTERIOR AND EXTERIOR
(2 YEAR REMOVABILITY EXTERIOR)

ADDS VISUAL INTEREST TO ANY PRINT



APPLICATIONS

Smooth Flat Surfaces
Point Of Sale Graphics
Interior Décor
Decals & Stickers

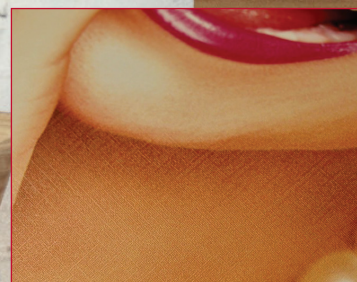

DRYTAC®
ADHESIVE SCIENCE

www.drytac.com

Textures LINEN

ReTac® Textures Linen is a 6 mil printable, matte white polymeric PVC film with ReTac® ultra removable adhesive. It has an embossed linen like finish that adds depth and visual appeal to static, flat graphics. A subtle texture like Linen draws attention to your image or message in a distinct and creative way. The film is also flame resistant according to FTMS 191, Method 5903.

RETAC® TEXTURES IS A PHTHALATE-FREE FILM.

- IDEAL FOR WALL GRAPHICS, CUSTOM
- WALL MURALS, INTERIOR DÉCOR, RETAIL DISPLAYS, TRADE SHOW GRAPHICS AND SIGNAGE, AND TEXTURED LABELS.

- RETAC® TEXTURES HAS BEEN TESTED TO
- FTMS 191, METHOD 5903 FOR FLAME RESISTANCE, MAKING IT PERFECT FOR APPLICATION IN PUBLIC AREAS THAT REQUIRE COMPLIANCE WITH STRICT FIRE REGULATIONS, SUCH AS AIRPORTS, HOTELS AND HOSPITALS.

For more information,
performance and warranty guide
lines please contact your local
Drytac office.

© 2018 Drytac Corporation. E&OE.
All other trademarks are the property
of their respective owners.

TECHNICAL SPECIFICATION

PRODUCT STRUCTURE

| | |
|---------------|---|
| Film | Matte White Polymeric PVC |
| Adhesive | ReTac® ultra removable and re-positionable adhesive technology |
| Release Liner | 143 gsm 2 Side PE Coated, 1 Side Solventless Siliconised Fine Paper |

PRODUCT CHARACTERISTIC

| | | |
|---------------------------|--|-------|
| Film Thickness | 6 mil | 7 mil |
| Adhesive Layer | 1 mil | |
| Film/Adhesive Ratio | 6:1 | |
| UV Protection Factor | Not Applicable | |
| Outdoor Durability | 5 year; 2 years removability | |
| Application Temperature | >41°F (5°C) | |
| Service Temperature Range | -4°F to 149°F (-20°C to 65°C) | |
| Flame Retardancy | FTMS 191 (According to Method 5903) | |
| Shelf Life | 2 years | |
| Storage Conditions | 59°F to 72°F (15°C to 22°C); 50 - 55% Relative Humidity | |

INSTALLATION RECOMMENDATION

Please see Wall Graphic Installation & Removal Instructions for further details. The surface must be clean and smooth and free of defects before application.

DRYTAC®
ADHESIVE SCIENCE



www.digitalcolorink.com
877-616-8600
Baltimore, MD | Charlotte, NC

USA

5601 Eastport Boulevard,
Richmond,
Virginia, 23231,
USA
customerservice@drytac.com
Tel: +1 800.280.6013