

Smooth-N-Groove™

Smooth print surface
for walls with grooves.

NEW
Product!

- White foil media with permanent adhesive (9 mil thick).
- Conforms to rough surfaces.
- No heat guns required.
- Easy to install (peel & stick).
- No overlamine required

Application Ideas:

- Sporting Events
- Now Hiring Sign
- Wayfinding
- Retail Entrances
- Cultural Events
- Restaurants
- Office Hours on Exterior Wall

Smooth-N-Groove Surfaces

Brick	Concrete	Stone	Corrugated Metal
✓	✓	✓	✓




Exclusive Multi-Layer Construction

Printable Layer

Conformable Layer

Super Aggressive PSA

Easy peel liner

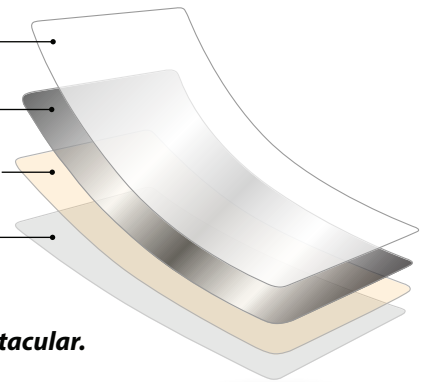

Print. Peel. Stick. Spectacular.



Printable with UV inkjet,
latex, solvent, eco-solvent.



**No laminate
required**



WWW.DIGITALCOLORINK.COM

BALTIMORE, MD | CHARLOTTE, NC

TOLL: 877.616.8600



jessupmfg.com

Smooth-N-Groove™

Sizes:

- SNG-47x300 (47"x300')
- SNG-47x100 (47"x100')
- SNG-47x50 (47"x50')

Duration:

- Outdoor use: 1+ year



PHYSICAL PROPERTIES	TEST METHODS	AVERAGE RESULTS
Thickness	PSTC - 133 - Substrate - Pressure Sensitive adhesive - Release Liner	0.0065 inch (0.165 mm) 0.0025 inch (0.064 mm) 0.006 inch (0.152 mm)
Peel Adhesion to:	PSTC - 101	
- Stainless Steel	15 minute dwell 24 hour dwell	80 oz/in (88 N/100 mm) 100 oz/in (110 N/100 mm)
- Powder coated surfaces *	15 minute dwell 24 hour dwell	70 oz/in (77 N/100 mm) 80 oz/in (88 N/100 mm)
- Polyethylene	15 minute dwell 24 hour dwell	50 oz/in (55 N/100 mm) 60 oz/in (66 N/100 mm)
Shear Adhesion to:	PSTC - 107	
- Stainless Steel	1/2" x 1/2" x 1000g	5 hours
Tack	PSTC - 6 Rolling Ball Tack	< 5 inches



WWW.DIGITALCOLORINK.COM

BALTIMORE, MD | CHARLOTTE, NC

TOLL: 877.616.8600



jessupmfg.com